


ROLL WIDTH	CAP. (LBS.)
10"	2000
20"	2000
30"	2000
40"	1660
50"	1360
60"	1050
70"	1000

### L3-6 AIR TIP LIFT SPECIFICATIONS

- 1.) OPERATING AIR PRESSURE: 90 PSI
- 2.) ROTATION: 90 DEGREES
- 3.) FILTER, REGULATOR, LUBRICATOR BY OWNER
- 4.) HOIST HOOK MUST HAVE SAFETY LATCH
- 5.) UNIT FURNISHED WITH AIR QUICK COUPLING
- 6.) CONTROL PIPING TO HOIST BY OWNER

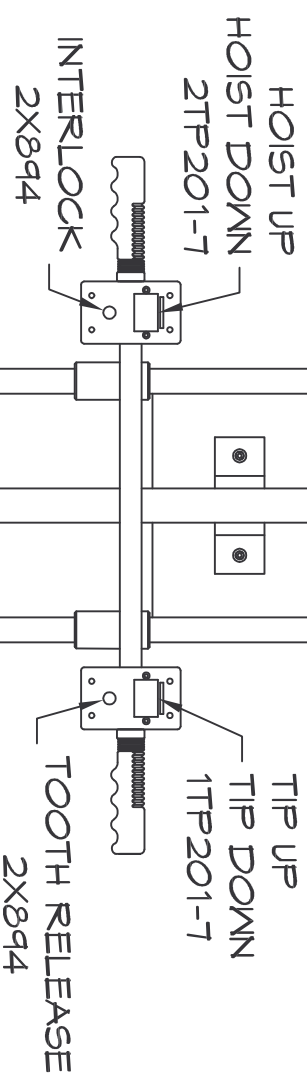

TOLERANCES UNLESS SPECIFIED	
MACHINED .XXX	- ±.005"
.XX	- ±.01"
.X	- ±.05"
FRACTIONS	- 1/16"
ANGULAR	- ±.3°

REV	DATE	BY	CHANGES

TILT-LOCK  
12070 43RD STREET NE  
ST. MICHAEL, MN 55376  
PH: 763-497-7045  
FAX: 763-497-7046

TITLE: L3-6 AIR TIPLIFT (P.T.R) (H.M.C)  
SPECIAL PROBE AND TORQUE ARM

DRAWN BY: TGK  
RELEASED BY: DWS

DATE: 4/7/04

SCALE: NONE

WEIGHT: 235 LBS.

SIZE: B

REV:

NOTICE TO PERSONS RECEIVING THIS DRAWING AND/OR TECHNICAL INFORMATION: TILT-LOCK CLAIMS PROPRIETARY RIGHTS TO THE MATERIAL DISCLOSED THEREON. THIS DRAWING AND/OR TECHNICAL INFORMATION IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN OR REFERRED TO HEREON WITHOUT DIRECT WRITTEN PERMISSION FROM TILT-LOCK TO THE USER.

TILT-LOCK IS NOT RESPONSIBLE FOR THE STRENGTH OF BUILDING MEMBERS FURNISHED BY OTHERS.