
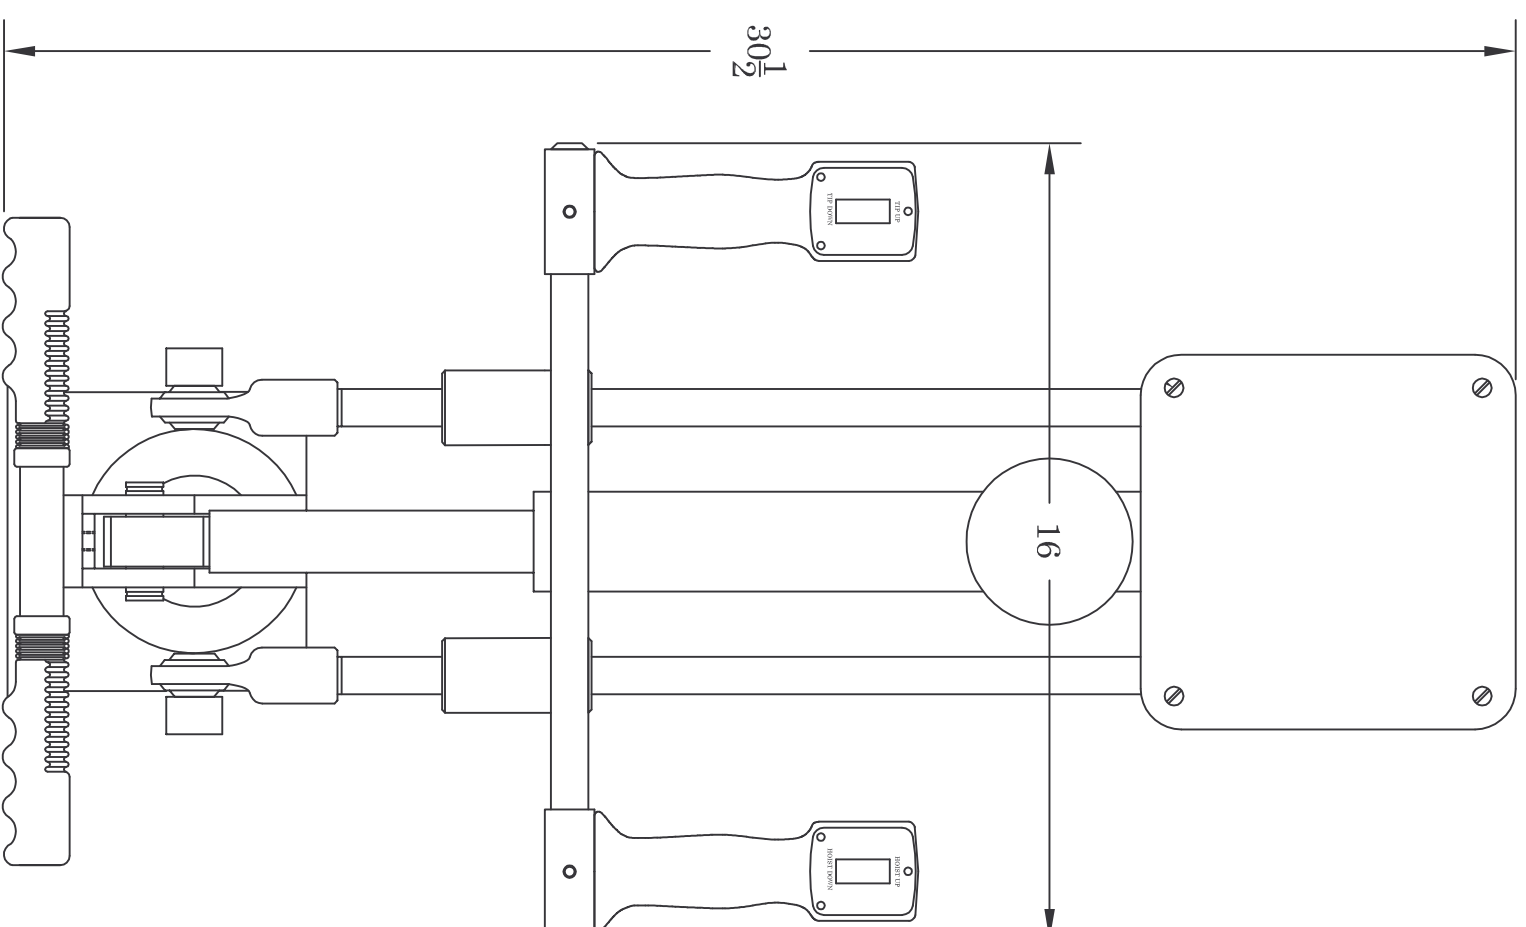


LD1-3 ELECTRIC TIPLIFT SPECIFICATIONS

- 1.) POWER REQ: 115-1-60 5.5 AMPS
- 2.) ROTATION: 90 DEGREES
- 3.) MANUAL TOOTH RELEASE
- 4.) HOIST HOOK MUST HAVE SAFETY LATCH
- 5.) CONTROL PIPING TO HOIST BY OWNER
- 6.) CAPACITY CHART BELOW

ROLL WIDTH	CAP. (LBS.)	ROLL WIDTH	CAP. (LBS.)
4"	344	16"	156
6"	287	18"	143
8"	246	20"	132
10"	215	22"	123
12"	191	24"	115
14"	172	26"	108

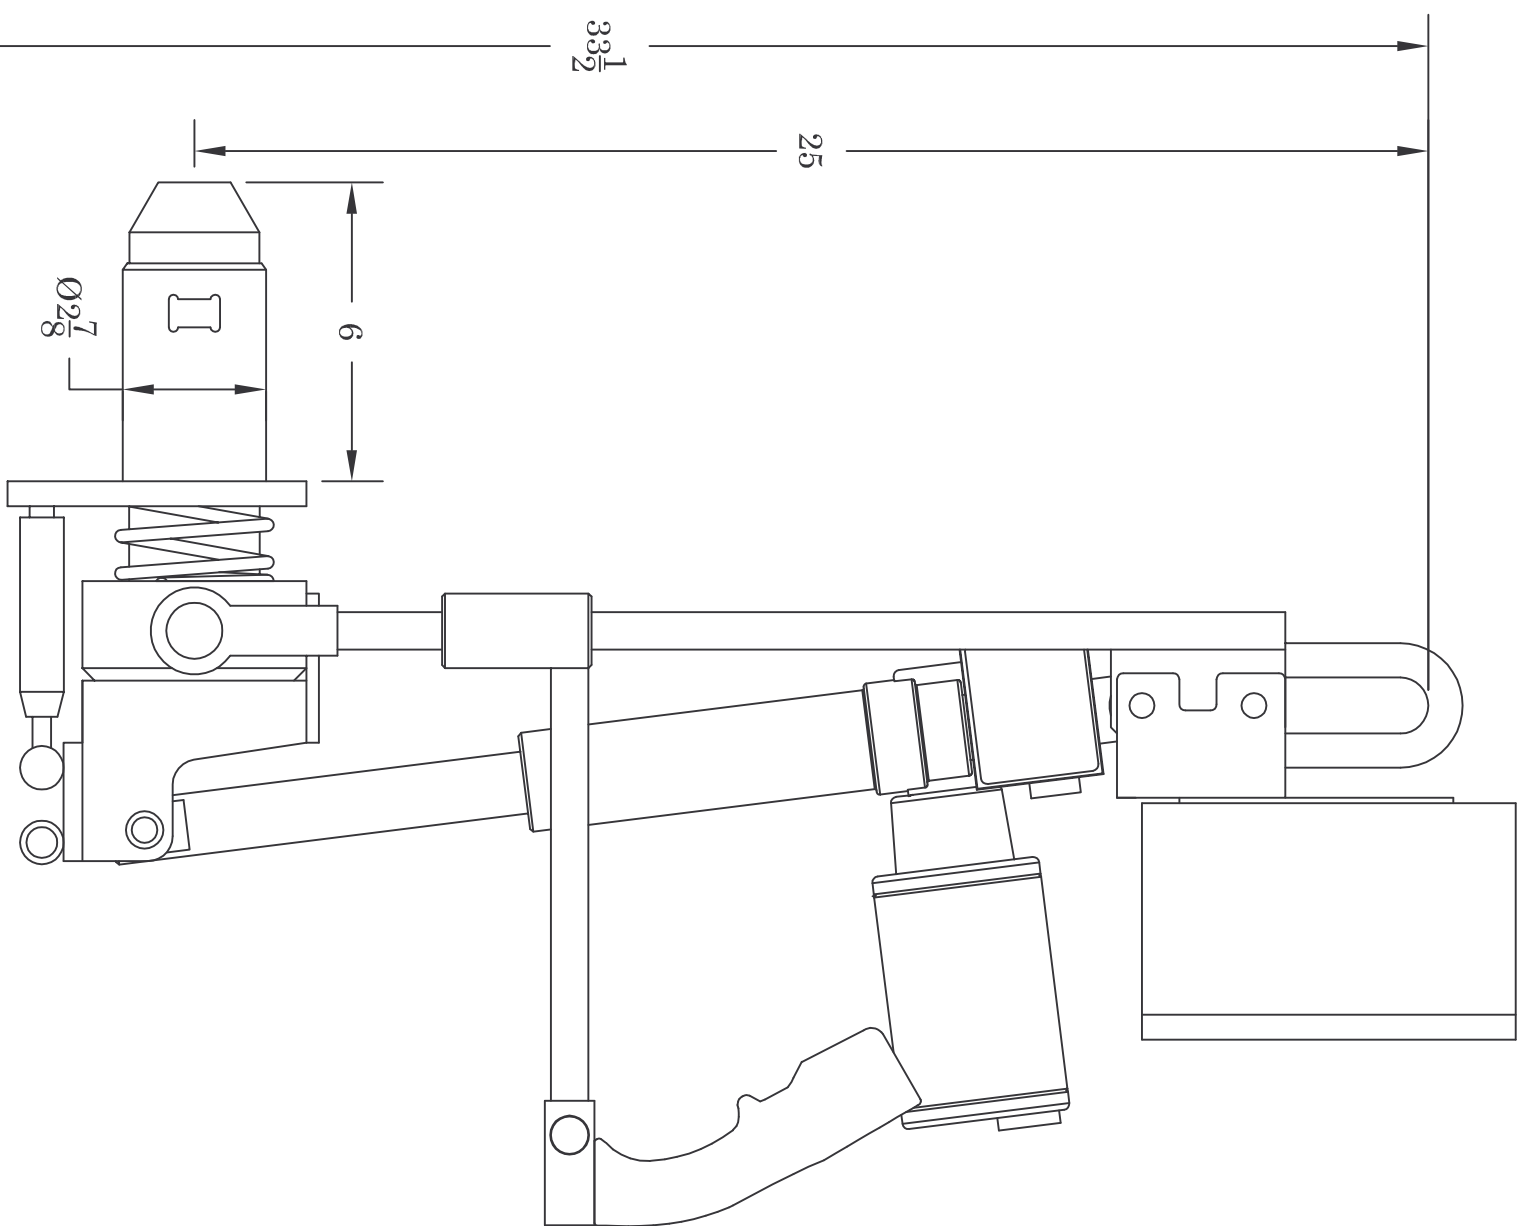

TOLERANCES UNLESS SPECIFIED

MACHINED .XXX - ±.005"
 .XX - ±.01"
 .X - ±.05"
 FRACTIONS - ±1/16"
 ANGULAR - ±.3°

NOTICE TO PERSONS RECEIVING THIS DRAWING AND/OR TECHNICAL INFORMATION: TILT-LOCK CLAIMS PROPRIETARY RIGHTS TO THE MATERIAL DISCLOSED THEREON. THIS DRAWING AND/OR TECHNICAL INFORMATION IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN OR REFERRED TO HEREON WITHOUT DIRECT WRITTEN PERMISSION FROM TILT-LOCK TO THE USER.

REV	DATE	BY	CHANGES



TILT-LOCK
 12070 43RD STREET NE
 ST. MICHAEL, MN 55376
 PH: 763-497-7045
 FAX: 763-497-7046

TITLE:

LD1-3 TIP-LIFT

DRAWN BY:	DATE:	SCALE:	WEIGHT:
TGK	5/11/04	NONE	67
RELEASED BY:	DWG.	TA32090C	SIZE: B
			REV.

TILT-LOCK IS NOT RESPONSIBLE FOR THE STRENGTH OF BUILDING MEMBERS FURNISHED BY OTHERS.